

RBR800VF

POWERFUL SHAFT BORING



Raise Boring Rig RBR800VF

- › For long raises and large reaming diameters
- › Robust and powerful design
- › Mechanized wrench system and rod handling for improved work safety
- › Highly efficient variable frequency drive


**PIONEERING
UNDERGROUND
TECHNOLOGIES**



Raise Boring Rig RBR800VF

Technical specifications

The **Raise Boring Rig (RBR)** developed by Herrenknecht is designed for the construction of shafts in rock down to 2,000 meters in depth. Thanks to its compact design, it offers high flexibility even under space constraints and is therefore suitable for various applications in the mining industry. It has proven its worth with its modular design and its efficient center-free drive. Connection shafts for mining or penstocks for pump storage power plants can be constructed quickly and safely.

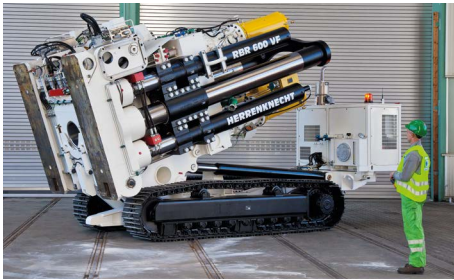

Transport system



Pipe handling



Control cabin

RBR800VF

- › Reaming torque: 750 kNm (553,170 lbf.ft)
- › Max. static torque: 900 kNm (663,805 lbf.ft)
- › Thrust force: 10,000 kN (2,248,000 lbf)
- › Inclination (from vertical): 0°–45°

Dimensions

- › Height (extended/retracted): 6.86 m/5.08 m (22.51 ft/16.67 ft)
- › Width: 2.39 m (7.84 ft)
- › Depth: 2.305 m (7.56 ft)

Weight

- › Rig: 50 t (110,231 lb)

Hoist unit

- › Stroke: 2.4 m (7.87 ft)

Modular design for high degree of flexibility.

PIPE HANDLER

- › Load: 1,000 kg (2,205 lb)
- › Handling system: mechanized
- › Optional: axial drill rod adjustment

WRENCH SYSTEM

- › Handling system: fully hydraulically operated

Mechanized drill rod handling and wrench system for safe and easy handling.

MAIN DRIVE

- › Drive: electric (VF)
- › Number of motors: 4
- › Installed power: 720 kW (965 hp)
- › Rotational speed (pilot drilling): 0 rpm–50 rpm
- › Rotational speed (reaming): 0 rpm–13 rpm
- › Hydraulic drive system: on request

The powerful electric drive is ideal for long raises and large reaming diameters.

Variable speed and torque limiting control.

DRIVEHEAD

- › Float: 90 mm (3.54 inch)
- › Swivel: ±1°
- › Optional: active float system

Drivehead with swivel and float function saves drill rod threads.

Active float to reduce weight on threads while make up and break out operation.

DRILL ROD

- › Diameter: 12 7/8 inch
- › Optional diameter: up to 15 inch
- › Length, s/s: 1.524 m (60 inch)
- › Other sizes: on request

HYDRAULIC POWER PACK

- › Power: 110 kW (148 hp)
- › Cooling: water cooled

ELECTRIC POWER PACK

- › Input voltage: 690 V
- › Frequency: 50 Hz/60 Hz

CONTROL CABIN

- › Controls: touch screen and control panel

OPTIONAL EQUIPMENT

- › Digital Drilling Report
- › High pressure flushing pump
- › Transformer
- › Pipe Feeder
- › Transport frame
- › Control Cabinet
- › Chiller system
- › Flow meters
- › Drilling tools
- › Other tools on request

Crawler

- › Drive: diesel powered hydraulic drive
- › Power: 55 kW (74 hp)
- › Grade: max. +25%
- › Optional: forklift equipment

HERRENKNECHT MINING

77963 Schwanau
Germany
Phone +49 7824 302-0
Fax +49 7824 302 3528
mining@herrenknecht.com
www.herrenknecht.com

